


# ALFA

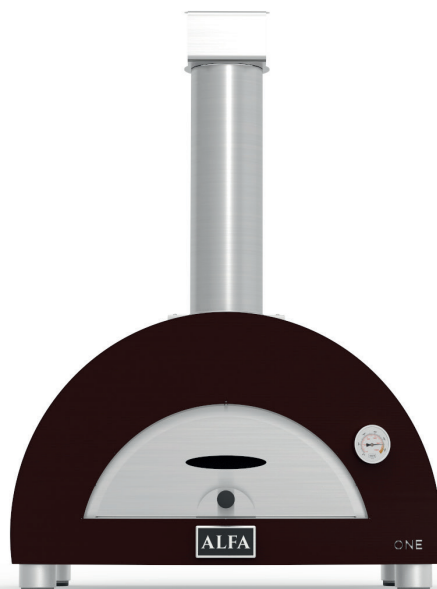

## ONE

LEGNA - WOOD

**COPPER**  
FXONE-LRAM




conforme a UNI 10474 e EN 13229  
UNI 10474 and EN 13229 compliant



### CARATTERISTICHE TECNICHE - TECHNICAL DETAILS

|   |  |   |  |
|---|--|---|--|
| <b>Peso</b><br><i>Weight</i>                              | 54 kg<br>119 lbs                           | <b>Materiali utilizzati</b><br><i>Used material</i>                                 | lamiera ferro. acciaio inox. fibra ceramica<br><i>iron sheet. stainless steel. ceramic fiber</i> |
| <b>Area piano forno</b><br><i>Oven floor area</i>         | 0.24 m <sup>2</sup><br>2.6 ft <sup>2</sup> | <b>Tipo di refrattario</b><br><i>Type of refractory</i>                             | Tavella silico-alluminoso<br><i>Alumina silicate bricks</i>                                      |
| <b>Dim. piano forno</b><br><i>Oven floor dim.</i>         | 60 x 40 cm<br>23.6 x 15.7 in               | <b>Combustibile consigliato</b><br><i>Recommended fuel</i>                          | Ciocchi diam. Max 5 cm. potature<br><i>Max 1.9 In diam. logs. trimmings</i>                      |
| <b>Minuti per scaldare</b><br><i>Heating time (min)</i>   | 10   | <b>Carica nominale</b><br><i>Rated charge</i>                                       | 6.9 kg/h<br>15.2 Lbs/h   |
| <b>N° pizze alla volta</b><br><i>Pizza capacity</i>       | 1  | <b>Tiraggio minimo</b><br><i>Minimum flue draught</i>                               | 10 Pa  |
| <b>Infornata di pane</b><br><i>Bread capacity</i>         | 1 kg<br>2.2 lbs                            | <b>Flusso volumetrico fumi</b><br><i>Flue smokes mass flow</i>                      | 57.7 g/s   |
| <b>Temperatura massima</b><br><i>Max oven temperature</i> | 500°C<br>1000°F                            | <b>Emissioni CO al 13% O<sub>2</sub></b><br><i>CO emission at 13% O<sub>2</sub></i> | 0.31% 3843 mg/Nm <sup>3</sup>  |
| <b>Consumo medio</b><br><i>Average fuel consumption</i>   | 2.5 kg/h<br>5.5 lbs/h                      | <b>Temperatura fumi</b><br><i>Smoke temperature</i>                                 | 395°C<br>743°F   |

## MISURE - DIMENSIONS

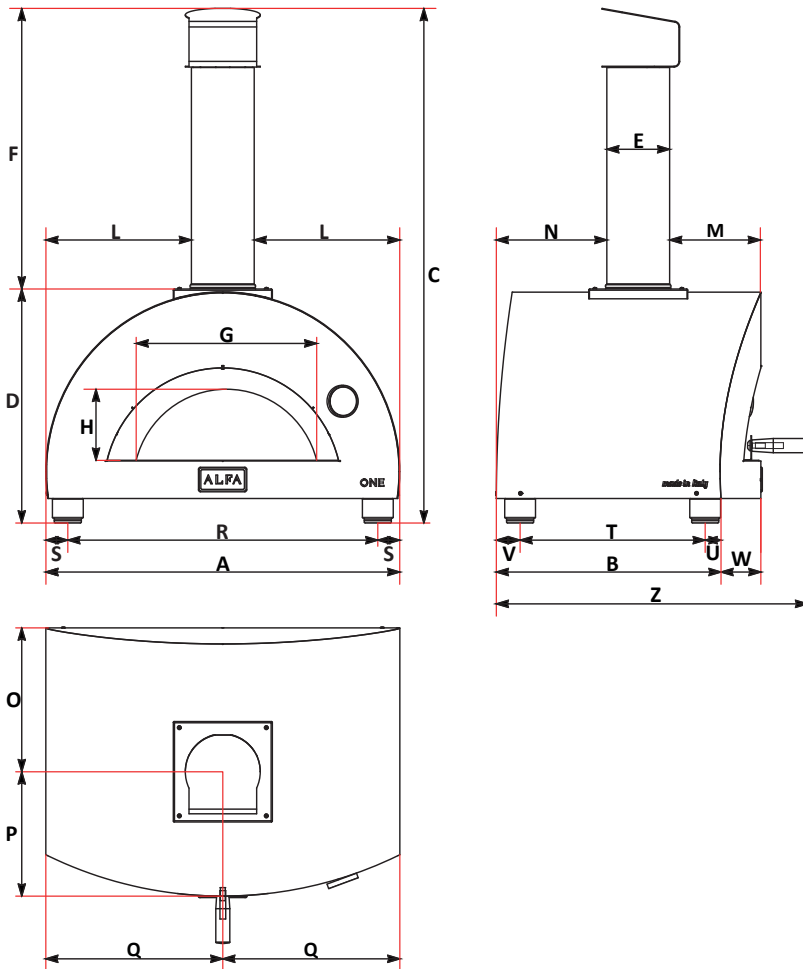

|   |                    |   |                    |
|---|--------------------|---|--------------------|
| A | 73.2 cm<br>28.8 in | O | 29.3 cm<br>11.5 in |
| B | 46.5 cm<br>18.1 in | P | 25.4 cm<br>10 in   |
| C | 105 cm<br>41.3 in  | Q | 36.6 cm<br>14.4 in |
| D | 47.7 cm<br>18.8 in | R | 64.1 cm<br>25.2 in |
| E | 13 cm<br>5.1 in    | S | 4.5 cm<br>1.8 in   |
| F | 57.3 cm<br>22.3 in | T | 38.3 cm<br>15.1 in |
| G | 38.8 cm<br>15.1 in | U | 3.3 cm<br>1.3 in   |
| H | 14.5 cm<br>5.6 in  | V | 4.9 cm<br>1.9 in   |
| L | 30.1 cm<br>11.9 in | W | 8.2 cm<br>3.2 in   |
| M | 18.9 cm<br>7.4 in  | Z | 64.4 cm<br>25.4 in |
| N | 22.9 cm<br>9.3 in  |   |                    |

### DIMENSIONE IMBALLO PACKAGING

| Larghezza<br>Width | Profondità<br>Depth | Altezza<br>Height |
|--------------------|---------------------|-------------------|
| 75 cm<br>29.2 in   | 58 cm<br>22.6 in    | 46 cm<br>17.9 in  |

## PARTI DI RICAMBIO - SPARE PARTS

| Descrizione<br>Description              |   | Codice<br>Code  |
|---|---|-----------------|
| Comignolo<br>Chimney cap                | A | SML-03-0221     |
| Canna fumaria<br>Chimney                | B | TI130_500_SAT   |
| Sportello<br>Door                       | G | SSML-03-0224    |
| Flangia<br>Flange                       | H | SML-03-0220     |
| Carter esterno<br>External shell        | I | SCRT-03-0133-RA |
| Termometro<br>Thermometer               | J | YT63-135        |
| Mattoni 30x20 cm<br>Red bricks 30x20 cm | K | RRA3020         |
| Gasbeton                                | L | D10GASB-D300    |
| Piedini<br>Feet (n.4)                   | M | SETPIE-M10X20   |
| Logo Alfa (v1.0)                        | N | D14PLAC-ALFA    |
| Paletta<br>Peel                         | O | SSML-02-0225    |
| Paralegna<br>Wood holder                | P | SML-03-0222     |

